



Thermal Clip-On Hunt335



Technical Specifications

ThermTec Technology Co., Ltd. Email: info@thermeyetec.com Website: https://www.thermeyetec.com









HUNT 335

Key Features

- 384*288 thermal resolution, NETD≤20mk;
- 1024*768 resolution with 0.39-inch OLED display;
- Magnesium alloy housing;
- Lightweight of 400g and compact design;
- Self-learning image correction;
- Ultra-long image stability;
- Automatic object detection and distance measurement;
- Various pseudo colors and target outline mode;
- Up to 7h continuous working for lithium battery;
- Audio and recoil-activated video supported;
- Wireless remote control;
- APP connection via Wi-Fi supported;
- No re-zeroing required and quick attachment to day optics;

Applications


- Night hunting
- Observation

Specifications

Model	Hunt335
	Microbolometer
Туре	Uncooled
Resolution	384x288
Pixel pitch	12µm
NETD	≤20mk
Spectral range	8-14µm
Frame rate	50HZ
Detection range	1,800m
	Optics
Objective lens	35mm
Field of view	7.5°x 5.7°
Recommended	1-8X
magnification of the day scope	
Digital zoom	X1
	Display
Туре	AMOLED
Resolution, pixel	1024x768
Display size	0.39 inch

Function		
Max. recoil power on rifled weapon	6,000J	
Image calibration	Via shutter	
RAV	Yes	
Video Recorder		
Photo/video playback	Yes	
Built-in memory	64GB	
	Interface	
Type C	Data Transfer, battery charging	
MIC	Yes	
Wi-Fi	Yes	
Bluetooth	Yes, Remote control	
	Battery	
Built-in battery	7h	
Environment		
Body material	Magnesium alloy	
Connection thread	M52×0.75	
Operating temperature	-20- +50°C	
IP rating	IP67	
Weight, g	400	
Dimension, mm	125(L)x65(W)x77(H)	

Accessories

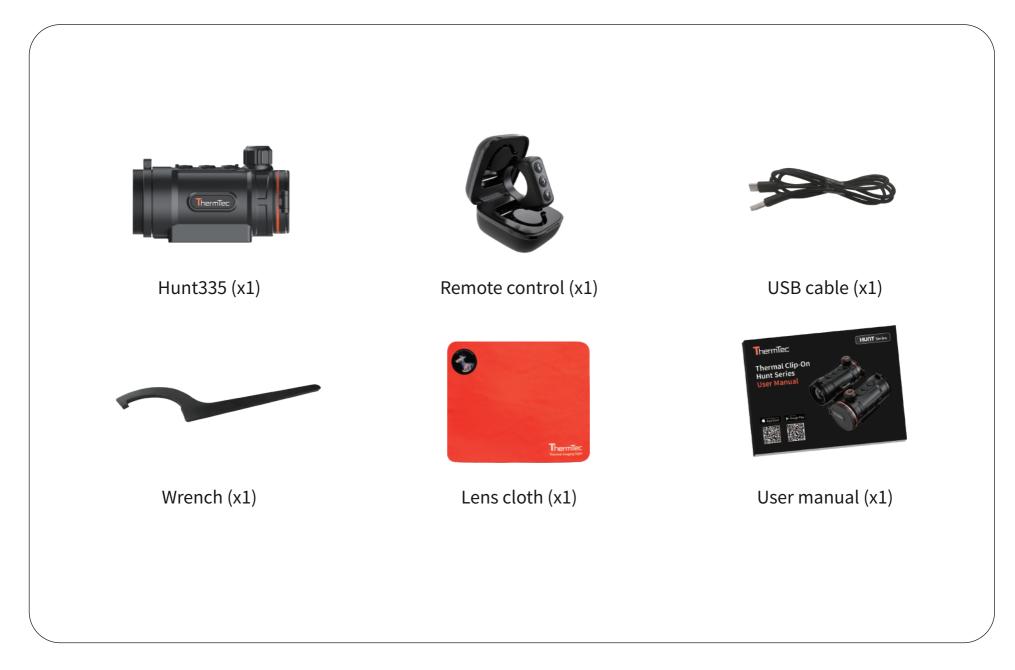

Dimension

Unit: mm

